Dropsafe®

Drops Prevention Technology

Product Guide

Professional.
Reliable.
Secure.

www.dropsafe.com

About Us

At Dropsafe we improve workplace safety by collaborating with industry professionals in the Oil and Gas, Marine, Mining and Industrial sectors to develop effective application-specific dropped and falling objects prevention solutions. For over 20 years we have been delivering innovative and patented mesh-security and mesh-safety products.

At Dropsafe we continue to invest and expand into new product categories to provide our customers with the solutions to protect their personnel from DROPs hazards. Our proprietary technologies have become the standard in the onshore and offshore Oil and Gas Sectors. We proudly serve over 300 customers and have exclusive fleet-wide supplier agreements with Oil and Gas industry leaders.

At Dropsafe we provide work place safety solutions for our customers, so they can better protect their people.

Our Products

Dropsafe proprietary DROPs prevention products have become the industry standard in the Oil and Gas industry. We focus on innovation, quality, industry collaboration and 3rd party testing and validation in order to deliver product performance that exceeds customer expectations. We maintain a leading industry-wide quality record, supported by rigorous in-house procedures and state-of-the-art manufacturing control and monitoring technology.

Barrier

Nets

Barricades

Brims

Pouches

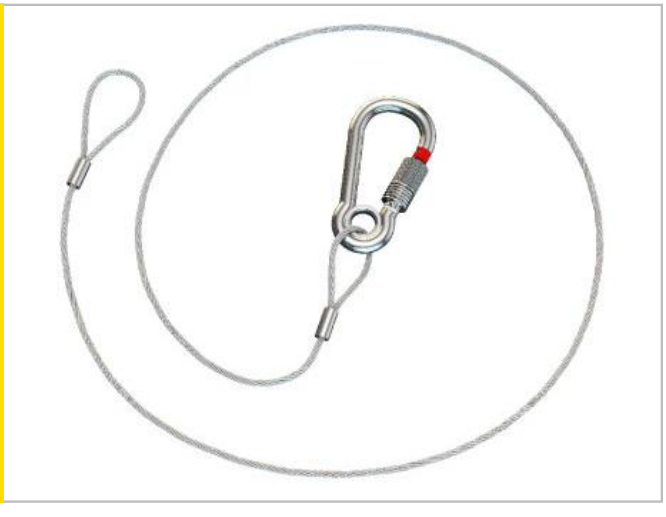

Accessories

Contents

Our Products 3

Dropsafe Barrier 5

- Ordering and Installation Process 6
- Enquiry Form 7

Dropsafe Nets 8

- Ordering and Installation Process 9
- Request For Quotation Form 10
- New Product Enquiry Form. 11
- Nets For Floodlights 12
  - Fluorescent/LED Strip Lights 16
  - Speakers/Horns 18
  - Navigation/Strobe Lights 19
  - CCTV Cameras 20
  - Self-Retracting Lifelines 22
  - Junction Boxes, Heat, Smoke & CO_2 Detectors. 24

Dropsafe Barricades 26

Dropsafe Brims 28

Dropsafe Pouches 30

Dropsafe Accessories 32

General RFQ Form (Barricades, Brims, Pouches & Accessories) 34

DISCLAIMER

ALL OF DROPSAFE'S WARRANTIES AND LIABILITIES (INCLUDING WITHOUT LIMITATION, AT LAW, CONTRACT, TORT AND EQUITY) ARE UNCONDITIONALLY AND FOREVER REVOKED, TO THE MAXIMUM EXTENT PERMITTED BY LAW, IF THE PRODUCT INSTALLATION INSTRUCTIONS ACCOMPANYING THIS PRODUCT ARE NOT STRICTLY FOLLOWED.

IMPORTANT

The information contained in this Product Guide is for reference only. For further Product information visit dropsafe.com or email info@dropsafe.com. For information regarding the correct methods for installation, survey and replacement of our products consult the detailed instructions provided with all Dropsafe Products.

Dropsafe Barrier

The Dropsafe Barrier is a dropped object prevention system, that reduces the risk of harm to people and critical equipment caused by items falling from height.

The system is affixed to the inside of elevated guardrailing of permanent and temporary installations. This prevents loose dynamic items from becoming dropped objects.

The system can also be used as a physical barrier between personnel and operating machinery to significantly improve work place safety.

Installation Types

Permanent Installation



Temporary Installation



Cherry Pickers



Storage Areas



Back Scratchers



Machine Guards

Guardrailing configurations can vary throughout a facility. Guardrailing can have different post and rail sizes, heights and spacings and toe board variations, if fitted. These variations must be properly captured using our forms, so that you can receive an accurate quotation and the correct components for installation.

Quotations

Barrier quotations are provided per meter for either a Standard Installation or a Non-Standard Installation type. We can determine your installation type and provide a quote after you complete and send us the Barrier "**Enquiry Form.**"

⚠ WARNING

Install Dropsafe Barrier only if:

1. Guardrailing is industry compliant and in good serviceable condition;
2. Areas are not exposed to hazardous chemicals, listed at dropsafe.com; and
3. The installation instructions are strictly followed.

Features

- High impact resistance (62.5 J)
- Designed for high winds (Category 5 wind speeds)
- Small mesh aperture (19.8 mm / 0.78 Inch)
- Suitable for harsh environments (5 years weather testing)

Dropsafe Barrier - Ordering and Installation Process

You can order and install yourself or engage a Dropsafe approved 3rd party contractor.

Ordering

1	You complete the "**Enquiry Form**" (photocopy from Product Guide or download from www.dropsafe.com/resource-centre). On the form, you select the self-survey or 3rd party survey option.

3rd Party Survey

2	You engage one of the 3rd party contractors introduced by us.
3	3rd party contractor surveys your facility and sends report to you and us.

Self-Survey

2	We email you the "**Orientation Guide**" and the "**Information Collection Form**."
3	You complete the "**Information Collection Form**" and email it to barrier@dropsafe.com.

4	We email you the "**Quotation**." You then place an order for the required Dropsafe Barrier installation area(s).

Product Delivery

5	Your order is packed and labelled for each installation area.

Installation

3rd Party Installation

6	Email us and we will introduce the closest 3rd party installation contractors in your area.

Self-Installation

6	Installation instructions are provided with the product. We also provide online training for your installation type.

Dropsafe Barrier - Enquiry Form

Dropsafe®
Drops Prevention Technology

We must receive an accurate and complete "Enquiry Form" to provide a quotation.

Date: ___/___/_____ (DD / MM / YYYY) Company: _____ Facility: _____

State / Province / Area: _____ Country: _____

Contact Person: _____ Position: _____

Email: _____ Phone: _____

Instructions for completing table below

1 Insert Area Type: A= Walkway guardrailing B= Stairway guardrailing C= Under stairs D= Machinery guardrailing E= Back scratcher F= Other

2 Enter a descriptive Area Name.

3 For guardrailing, enter the Short Post Spacing Quantity. →

4 For guardrailing, enter the Long Post Spacing Quantity. →



5 Select unit (meter or feet). Enter the Total Length of that area. *Note: If walkways & stairways have guardrailing on both sides, add both sides together for the Total Length of that area.*

6 Take a clear perspective photo of the area where the Barrier will be installed. Enter the photo file name and attach the photo to the email. →

Perspective photo example

7 If a Technical Drawing is available, enter the file name and attach the file to the email.

1 Area Type	2 Area Name	3 Short Post Spacing Quantity	4 Long Post Spacing Quantity	5 Total Length ☐ meter ☐ feet	6 Photo File Name	7 Technical Drawing
A	*Walkway along hose storage area*	*10*	*12*	*145*	*IMG_112.JPG*	*Walkway_01.PDF*

Site survey options: ☐ 3rd party ☐ Self Installation options: ☐ 3rd party ☐ Self

Pricing is Ex-works. Select your preferred Ex-works location: ☐ Houston ☐ UK ☐ Dubai ☐ Singapore ☐ Norway ☐ Hong Kong

Please contact us at barrier@dropsafe.com for any questions.

Version 05/18

Dropsafe Nets

The Dropsafe Nets are dropped object prevention devices, that reduce the risk of harm to people and critical equipment caused by items falling from height.

The Nets enclose and tether items and fixtures located at height (such as lights, speakers, horns, CCTV cameras, etc.) to prevent these items from becoming a dropped objects hazard (from impact, fatigue, corrosion, vibration or poor maintenance).

Fixture Types

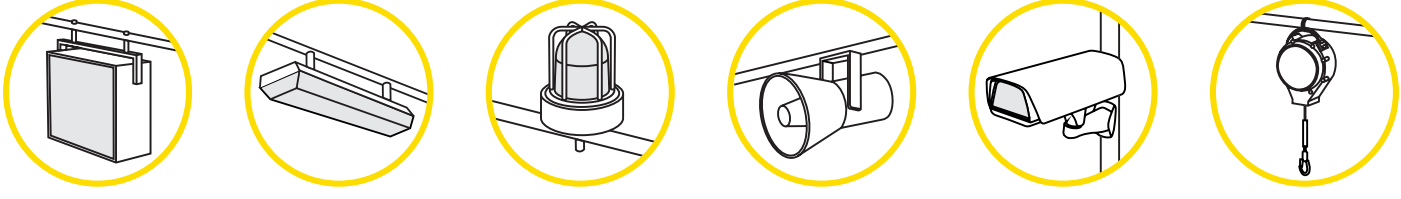

Floodlights | Fluorescent/ LED Strip Lights | Nav/ Strobe Lights | Speakers/ Horns | CCTV Cameras | Self-Retracting Lifelines

Quotations

Fixtures installed at height vary in shape, size, weight and mounting configuration. To select the correct part number from this product guide, or to make a new product enquiry, you must provide accurate information about your fixture(s). In order for us to provide an accurate quotation, you must follow the Ordering Process .

⚠ WARNING

The attachment structure must be strong enough to support the fixture if it drops.
Install Dropsafe Net only if:

1. The distance between the fixture and the attachment point is:
   - vertically less than 30 cm (12”)
   - horizontally less than 50 cm (20”)

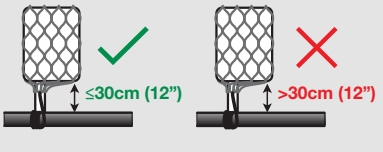

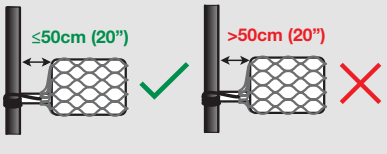

2. The net must be snug (not loose) around the fixture.

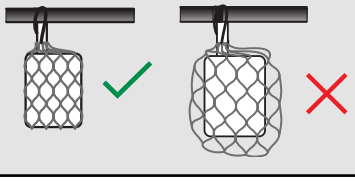

Features

- 5X SWL — Designed and tested to over 5 times Safe Working Load (SWL)
- 500°C / -40°C — Withstands extreme temperatures up to 500°C (932°F), down to -40°C (-40°F)
- 316 — SUS/AISI 316 stainless steel wire and components

Dropsafe Nets - Ordering and Installation Process

You can order and install yourself or engage a Dropsafe approved 3rd party contractor.

Ordering

3rd party ordering

1 Email us the facility address at net@dropsafe.com and we will introduce the closest 3rd party contractors in your area.

2 3rd party contractor surveys your facility and sends report to you and us

Self-ordering

1 Collect the following for each fixture type you intend to secure:

- Fixture weight including mounting bracket
- Fixture dimensions (Length, Width & Height)
- Mounting configuration:

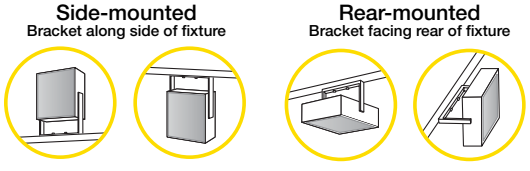

- Perspective photo
- Fixture manufacturer & model (optional)

2 Reference product guide to match Net Part No. to your fixture types.

To match a fixture to a Net Part No. from the product guide ensure that:

- Fixture weight incl. mounting bracket does not exceed the stated SWL
- One dimension size does not exceed the reference fixture by >15%
- Two dimension sizes do not exceed the reference fixture by >10%
- The mounting configuration matches the product guide reference

3 **Match**

You complete the "**Request For Quotation Form**" (photocopy from Product Guide or download from www.dropsafe.com/resource-centre) and email us at net@dropsafe.com.

3 **No Match**

You complete the "**New Product Enquiry Form**" (photocopy from Product Guide or download from www.dropsafe.com/resource-centre) and email us at net@dropsafe.com.

4 We email you the "**Quotation**." You then place an order for your selected Dropsafe Nets.

Product Delivery

5 Your order is packed and labeled for each installation area.

Installation

3rd Party Installation

6 Email us and we will introduce the closest 3rd party installation contractors in your area.

Self-Installation

6 We provide online training for your installation type. Installation instructions are also provided with the product.

Dropsafe Nets - Request For Quotation Form

Dropsafe®
Drops Prevention Technology

Complete this form if you know the required Net Part No. in the Product Guide. We must receive an accurate and complete form to provide a quotation.

Date: ___ / ___ / _____ (DD / MM / YYYY) Company: _____ Facility: _____

State / Province / Area: _____ Country: _____

Contact Person: _____ Position: _____

Email: _____ Phone: _____

Instructions for completing table below

1 Select the Part No. from the Product Guide.

2 Enter Fixture Location on the facility.

3 Select the Mounting: Side or Rear-mounted and confirm mounting is no more than 30cm/50cm. →

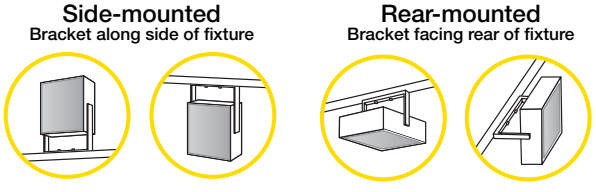

4 Enter Quantity.

5 Enter Fixture Manufacturer.

6 Enter Fixture Model.

7 Take a clear perspective photo of the fixture.
Enter the photo file name in the table and attach the photo to the email. →


Perspective photo example

1 Part No.	2 Fixture Location	3 Mounting	4 Quantity	5 Fixture Manufacturer	6 Fixture Model	7 Photo File Name
7500070	*Hose storage area*	☐ Rear ☑ Side	*20*	*Philips floodlight*	*LED 200W*	*IMG_195.JPG*
		☐ Rear ☐ Side				
		☐ Rear ☐ Side				
		☐ Rear ☐ Side				
		☐ Rear ☐ Side				
		☐ Rear ☐ Side				
		☐ Rear ☐ Side				
		☐ Rear ☐ Side				
		☐ Rear ☐ Side				
		☐ Rear ☐ Side				
		☐ Rear ☐ Side				

Installation options: ☐ 3rd party ☐ Self

Pricing is Ex-works. Select your preferred Ex-works location: ☐ Houston ☐ UK ☐ Dubai ☐ Singapore ☐ Norway ☐ Hong Kong

Please contact us at net@dropsafe.com for any questions.

Version 05/18

Dropsafe Nets - New Product Enquiry Form

Dropsafe®
Drops Prevention Technology

Complete this form for fixtures that you could not match to a Net Part No. in the Product Guide. We must receive an accurate and complete form to match a Net product and provide a quotation. If we can't find a match we will contact you for more information.

Date: ___ / ___ / _____ (DD / MM / YYYY) Company: _____ Facility: _____
State / Province / Area: _____ Country: _____
Contact Person: _____ Position: _____
Email: _____ Phone: _____

Instructions for completing table below

1 Insert Fixture Type: A= Floodlight B= Fluorescent Light C= Nav/Strobe Light D= Speaker/Horn E= CCTV Camera F= Junction Box or Sensor Unit G= Self-Retracting Lifeline (SRL) H=Other

2 Select the Mounting: Side or Rear-mountedand and confirm mounting is no more than 30cm/50cm. →

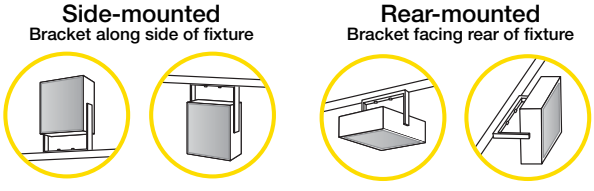

3 Enter Quantity.

4 Select the measurement unit cm or inch. Enter Dimensions of the fixture.

5 Select the measurement unit kg or lbs. Enter Fixture Weight including the mounting bracket.

6 Enter Fixture Location on the facility.

7 Enter Fixture Manufacturer.

8 Enter Fixture Model.

9 Take a clear perspective photo of the fixture.
Enter the photo file name in the table and attach the photo to the email. →


Perspective photo example

1 Fixture Type	2 Mounting	3 Quantity	4 Dimensions ☐ cm ☐ inch			5 Fixture Weight ☐ kg ☐ lbs	6 Fixture Location	7 Fixture Mfr.	8 Fixture Model	9 Photo File Name
			Side A (Longest)	Side B	Side C (Shortest)					
A	☐ Rear ☑ Side	*20*	*160*	*360*	*260*	*4*	*Hose storage area*	*Philips flood light*	*LED 200W*	*IMG_195.JPG*
	☐ Rear ☐ Side									
	☐ Rear ☐ Side									
	☐ Rear ☐ Side									
	☐ Rear ☐ Side									
	☐ Rear ☐ Side									
	☐ Rear ☐ Side									

Installation options: ☐ 3rd party ☐ Self

Pricing is Ex-works. Select your preferred Ex-works location: ☐ Houston ☐ UK ☐ Dubai ☐ Singapore ☐ Norway ☐ Hong Kong

Please contact us at net@dropsafe.com for any questions.

Version 05/18

Nets For Floodlights

Part No.: 7500070

Fixture Weight
SWL: 18.5 kg (41 lbs)

Fixture Dimensions
A = 300 mm (11.8”)
B = 300 mm (11.8”)
C = 300 mm (11.8”)

Mounting configuration
Side-mounted



Part No.: 7500070

Fixture Specifications
SWL: 18.5 kg (41 lbs)

Fixture Dimensions
A = 255 mm (10”)
B = 205 mm (8”)

Mounting configuration
Side-mounted



Part No.: 7500085

Fixture Weight
SWL: 25 kg (55 lbs)

Fixture Dimensions
A = 610 mm (24”)
B = 330 mm (13”)
C = 330 mm (13”)

Mounting configuration
Rear-mounted



Part No.: 7500085

Fixture Weight
SWL: 25 kg (55 lbs)

Fixture Dimensions
A = 490 mm (19.3”)
B = 310 mm (12.2”)
C = 300 mm (11.8”)

Mounting configuration
Rear-mounted



Part No.: 7500090

Fixture Weight
SWL: 20 kg (44 lbs)

Fixture Dimensions
A = 410 mm (16”)
B = 410 mm (16”)
C = 200 mm (8”)

Mounting configuration
Side-mounted



Part No.: 7500091

Fixture Weight
SWL: 35 kg (77 lbs)

Fixture Dimensions
A = 740 mm (29”)
B = 590 mm (23”)
C = 280 mm (11”)

Mounting configuration
Side-mounted



Part No.: 7500091

Fixture Weight
SWL: 35 kg (77 lbs)

Fixture Dimensions
A = 760 mm (30”)
B = 535 mm (21”)
C = 330 mm (13”)

Mounting configuration
Side-mounted



Part No.: 7500100

Fixture Weight
SWL: 30 kg (66 lbs)

Fixture Dimensions
A = 460 mm (18”)
B = 375 mm (15”)
C = 280 mm (11”)

Mounting configuration
Rear-mounted



Part No.: 7500100

Fixture Weight
SWL: 30 kg (66 lbs)

Fixture Dimensions
A = 460 mm (18”)
B = 460 mm (18”)
C = 265 mm (10.5”)

Mounting configuration
Rear-mounted



Part No.: 7500100

Fixture Weight
SWL: 30 kg (66 lbs)

Fixture Dimensions
A = 365 mm (14.3”)
B = 305 mm (12”)
C = 265 mm (10.5”)

Mounting configuration
Rear-mounted



Nets For Floodlights

Part No.: 7500106

Fixture Weight
SWL: 25 kg (55 lbs)

Fixture Dimensions
A = 535 mm (21”)
B = 460 mm (18”)
C = 165 mm (6.5”)

Mounting configuration
Side-mounted

Net fits this way



Part No.: 7500106

Fixture Weight
SWL: 25 kg (55 lbs)

Fixture Dimensions
A = 570 mm (22.4”)
B = 490 mm (19.3”)
C = 235 mm (9.3”)

Mounting configuration
Side-mounted

Net fits this way



Part No.: 7500106

Fixture Weight
SWL: 25 kg (55 lbs)

Fixture Dimensions
A = 530 mm (21”)
B = 385 mm (15”)
C = 280 mm (11”)

Mounting configuration
Side-mounted

Net fits this way



Part No.: 7500106

Fixture Weight
SWL: 25 kg (55 lbs)

Fixture Dimensions
A = 610 mm (24”)
B = 500 mm (19.7”)
C = 230 mm (9”)

Mounting configuration
Side-mounted

Net fits this way



Part No.: 7500106

Fixture Weight
SWL: 25 kg (55 lbs)

Fixture Dimensions
A = 455 mm (18”)
B = 405 mm (16”)
C = 280 mm (11”)

Mounting configuration
Side-mounted

Net fits this way



Part No.: 7500106

Fixture Weight
SWL: 25 kg (55 lbs)

Fixture Dimensions
A = 530 mm (21”)
B = 430 mm (17”)
C = 175 mm (7”)

Mounting configuration
Side-mounted

Net fits this way



Part No.: 7500107

Fixture Weight
SWL: 25 kg (55 lbs)

Fixture Dimensions
A = 600 mm (24”)
B = 420 mm (16.5”)
C = 160 mm (6.3”)

Mounting configuration
Side-mounted

Net fits this way



Part No.: 7500110

Fixture Weight
SWL: 25 kg (55 lbs)

Fixture Dimensions
A = 460 mm (18”)
B = 430 mm (17”)
C = 265 mm (10.5”)

Mounting configuration
Side-mounted

Net fits this way



Part No.: 7500110

Fixture Weight
SWL: 25 kg (55 lbs)

Fixture Dimensions
A = 450 mm (17.7”)
B = 400 mm (15.7”)
C = 265 mm (10.5”)

Mounting configuration
Side-mounted

Net fits this way



Part No.: 7500150

Fixture Weight
SWL: 25 kg (55 lbs)

Fixture Dimensions
A = 615 mm (24”)
B = 490 mm (19.5”)
C = 340 mm (13.5”)

Mounting configuration
Rear-mounted



Net fits this way

Nets For Floodlights

Part No.: 7500150

Fixture Weight
SWL: 25 kg (55 lbs)

Fixture Dimensions
A = 600 mm (23.6”)
B = 400 mm (15.7”)
C = 400 mm (15.7”)

Mounting configuration
Rear-mounted



Part No.: 7500150

Fixture Weight
SWL: 25 kg (55 lbs)

Fixture Dimensions
A = 600 mm (23.6”)
B = 440 mm (17.3”)
C = 235 mm (9.3”)

Mounting configuration
Rear-mounted



Part No.: 7500152

Fixture Weight
SWL: 35 kg (77 lbs)

Fixture Dimensions
A = 600 mm (23.6”)
B = 600 mm (23.6”)
C = 340 mm (13.3”)

Mounting configuration
Side-mounted



Part No.: 7500155

Fixture Weight
SWL: 30 kg (66 lbs)

Fixture Dimensions
A = 570 mm (22.4”)
B = 420 mm (16.5”)
C = 450 mm (17.7”)

Mounting configuration
Side-mounted



Part No.: 7500180

Fixture Weight
SWL: 48 kg (106 lbs)

Fixture Dimensions
A = 620 mm (24.5”)
B = 490 mm (19.5”)
C = 510 mm (20”)

Mounting configuration
Side-mounted



Part No.: 7500185

Fixture Weight
SWL: 48 kg (106 lbs)

Fixture Dimensions
A = 690 mm (27”)
B = 690 mm (27”)
C = 310 mm (12”)

Mounting configuration
Side-mounted



Part No.: 7500185

Fixture Weight
SWL: 48 kg (106 lbs)

Fixture Dimensions
A = 610 mm (24”)
B = 530 mm (21”)

Mounting configuration
Side-mounted



Part No.: 7500190

Fixture Weight
SWL: 15 kg (33 lbs)

Fixture Dimensions
A = 400 mm (15.7”)
B = 200 mm (8”)
C = 150 mm (6”)

Mounting configuration
Rear-mounted



Part No.: 7500320

Fixture Weight
SWL: 20 kg (44 lbs)

Fixture Dimensions
A = 560 mm (22”)
B = 215 mm (8.5”)

Mounting configuration
Rear-mounted



Part No.: 7500325

Fixture Weight
SWL: 25 kg (55 lbs)

Fixture Dimensions
A = 635 mm (25”)
B = 280 mm (11”)

Mounting configuration
Rear-mounted



Nets For Floodlights

Part No.: 7500327

Fixture Weight
SWL: 25 kg (55 lbs)

Fixture Dimensions
A = 580 mm (22.8”)
B = 510 mm (20”)

Mounting configuration
Rear-mounted



Net fits this way

Part No.: 7500327

Fixture Weight
SWL: 25 kg (55 lbs)

Fixture Dimensions
A = 610 mm (24”)
B = 300 mm (11.8”)

Mounting configuration
Rear-mounted



Net fits this way

Part No.: 7500327

Fixture Weight
SWL: 25 kg (55 lbs)

Fixture Dimensions
A = 460 mm (18”)
B = 430 mm (17”)

Mounting configuration
Rear-mounted



Net fits this way

Part No.: 7500330

Fixture Weight
SWL: 27 kg (59.5 lbs)

Fixture Dimensions
A = 700 mm (27.6”)
B = 420 mm (16.5”)

Mounting configuration
Rear-mounted



Net fits this way

Part No.: 7500331

Fixture Weight
SWL: 8 kg (17.6 lbs)

Fixture Dimensions
A = 355 mm (14”)
B = 275 mm (10.8”)

Mounting configuration
Rear-mounted



Net fits this way

Part No.: 7500335

Fixture Weight
SWL: 20 kg (44 lbs)

Fixture Dimensions
A = 406 mm (15.9”)
B = 83 mm (3.3”)

Mounting configuration
Side-mounted
Rear-mounted



Net fits this way

Nets For Fluorescent/LED Strip Lights

Part No.: 7500610

Fixture Weight
SWL: 20 kg (44 lbs)

Fixture Dimensions
A = 1840 mm (72.5")
B = 110 mm (4.3")

Mounting configuration
Rear-mounted



Net fits this way

Part No.: 7500620

Fixture Weight
SWL: 20 kg (44 lbs)

Fixture Dimensions
A = 740 mm (29")
B = 210 mm (8.3")
C = 150 mm (6")

Mounting configuration
Rear-mounted



Net fits this way

Part No.: 7500626

Fixture Weight
SWL: 8 kg (17.6 lbs)

Fixture Dimensions
A = 445 mm (17.5")
B = 54 mm (2.1")

Mounting configuration
Rear-mounted



Net fits this way

Part No.: 7500627

Fixture Weight
SWL: 8 kg (17.6 lbs)

Fixture Dimensions
A = 1059 mm (41.7")
B = 54 mm (2.1")

Mounting configuration
Rear-mounted



Net fits this way

Part No.: 7500628

Fixture Weight
SWL: 8 kg (17.6 lbs)

Fixture Dimensions
A = 1380 mm (54.3")
B = 54 mm (2.1")

Mounting configuration
Rear-mounted



Net fits this way

Part No.: 7500630

Fixture Weight
SWL: 15 kg (33 lbs)

Fixture Dimensions
A = 900 mm (35.5")
B = 190 mm (7.5")
C = 130 mm (5.1")

Mounting configuration
Rear-mounted



Net fits this way

Part No.: 7500640

Fixture Weight
SWL: 20 kg (44 lbs)

Fixture Dimensions
A = 1320 mm (52")
B = 190 mm (7.5")
C = 140 mm (5.5")

Mounting configuration
Rear-mounted



Net fits this way

Part No.: 7500640

Fixture Weight
SWL: 20 kg (44 lbs)

Fixture Dimensions
A = 1360 - 1500 mm (53.5-59")
B = 190 mm (7.5")
C = 130 mm (5")

Mounting configuration
Rear-mounted



Net fits this way

Part No.: 7500640

Fixture Weight
SWL: 20 kg (44 lbs)

Fixture Dimensions
A = 1350 mm (53")
B = 210 mm (8.5")
C = 150 mm (6")

Mounting configuration
Rear-mounted



Net fits this way

Part No.: 7500640

Fixture Weight
SWL: 20 kg (44 lbs)

Fixture Dimensions
A = 1385 mm (54.5")
B = 165 mm (6.5")

Mounting configuration
Rear-mounted



Net fits this way

Nets For Fluorescent/LED Strip Lights

Part No.: 7500650

Fixture Weight
SWL: 32 kg (71 lbs)

Fixture Dimensions
A = 1350 - 1500 mm (53 - 59”)
B = 230 mm (9”)
C = 160 mm (6.5”)

Mounting configuration
Rear-mounted



Net fits this way

Part No.: 7500650

Fixture Weight
SWL: 32 kg (71 lbs)

Fixture Dimensions
A = 1610 mm (63.5”)
B = 170 mm (6.8”)
C = 105 mm (4”)

Mounting configuration
Rear-mounted



Net fits this way

Part No.: 7500670

Fixture Weight
SWL: 30 kg (66 lbs)

Fixture Dimensions
A = 1350 mm (53”)
B = 300 mm (12”)
C = 180 mm (7”)

Mounting configuration
Rear-mounted



Net fits this way

Part No.: 7500670

Fixture Weight
SWL: 30 kg (66 lbs)

Fixture Dimensions
A = 1350 mm (53”)
B = 160 mm (6.3”)
C = 130 mm (5.1”)

Mounting configuration
Rear-mounted



Net fits this way

Nets For Speakers/Horns

Part No.: 7500070

Fixture Weight
SWL: 18.5 kg (41 lbs)

Fixture Dimensions
A = 340 mm (13.4”)
B = 250 mm (9.8”)

Mounting configuration
Side-mounted

Net fits this way



Part No.: 7500320

Fixture Weight
SWL: 20 kg (44 lbs)

Fixture Dimensions
A = 420 mm (16.5”)
B = 340 mm (13.4”)
C = 200 mm (8”)

Mounting configuration
Rear-mounted



Net fits this way

Part No.: 7500750

Fixture Weight
SWL: 8 kg (17.6 lbs)

Fixture Dimensions
A = 255 mm (10”)
B = 205 mm (8”)

Mounting configuration
Side-mounted

Net fits this way



Part No.: 7500815

Fixture Weight
SWL: 6 kg (13 lbs)

Fixture Dimensions
A = 215 mm (8.5”)
B = 140 mm (5.5”)
C = 140 mm (5.5”)

Mounting configuration
Side-mounted

Net fits this way



Part No.: 7500820

Fixture Weight
SWL: 6 kg (13 lbs)

Fixture Dimensions
A = 380 mm (15”)
B = 260 mm (10.5”)
C = 200 mm (8”)

Mounting configuration
Rear-mounted



Net fits this way

Part No.: 7500860

Fixture Weight
SWL: 20 kg (44 lbs)

Fixture Dimensions
A = 590 mm (21.6”)
B = 380 mm (7.4”)
C = 250 mm (8.8”)

Mounting configuration
Rear-mounted



Net fits this way

Part No.: 7500930

Fixture Weight
SWL: 10 kg (22 lbs)

Fixture Dimensions
A = 245 mm (9.6”)
B = 165 mm (6.5”)

Mounting configuration
Side-mounted

Net fits this way



Part No.: 7500931

Fixture Weight
SWL: 20 kg (44 lbs)

Fixture Dimensions
A = 550 mm (21.7”)
B = 190 mm (7.4”)
C = 225 mm (8.8”)

Mounting configuration
Rear-mounted



Net fits this way

Nets For Navigation/Strobe Lights

Part No.: 7500320

Fixture Weight
SWL: 20 kg (44 lbs)

Fixture Dimensions
A = 510 mm (20")
B = 215 mm (8.5")

Mounting configuration
Rear-mounted



Part No.: 7500720

Fixture Weight
SWL: 4 kg (8.8 lbs)

Fixture Dimensions
A = 220 mm (8.7")
B = 140 mm (5.5")

Mounting configuration
Rear-mounted



Part No.: 7500730

Fixture Weight
SWL: 5 kg (11 lbs)

Fixture Dimensions
A = 240 mm (9.5")
B = 210 mm (8.3")

Mounting configuration
Rear-mounted



Part No.: 7500750

Fixture Weight
SWL: 8 kg (17.6 lbs)

Fixture Dimensions
A = 400 mm (15.7")
B = 200 mm (8")

Mounting configuration
Rear-mounted



Part No.: 7500760

Fixture Weight
SWL: 30 kg (66 lbs)

Fixture Dimensions
A = 495 mm (19.5")
B = 495 mm (19.5")
C = 420 mm (16.5")
D = 150 mm (6")

Mounting configuration
Rear-mounted



Part No.: 7500780

Fixture Weight
SWL: 65 kg (143 lbs)

Fixture Dimensions
A = 980 mm (38.6")
B = 560 mm (22")
C = 560 mm (22")
D = 150 mm (6")

Mounting configuration
Rear-mounted



Part No.: 7500793

Fixture Weight
SWL: 15 kg (33 lbs)

Fixture Dimensions
A = 485 mm (19")
B = 360 mm (14.2")

Mounting configuration
Rear-mounted



Nets For CCTV Cameras

Part No.: 7500930

Fixture Weight
SWL: 10 kg (22 lbs)

Fixture Dimensions
A = 220 mm (8.7”)
B = 220 mm (8.7”)
C = 170 mm (6.7”)

Mounting configuration
Side-mounted

Net fits this way



Caution: Net secures motor box only, not camera body

Part No.: 7500941



Fixture Weight
SWL: 5 kg (11 lbs)

Fixture Dimensions
A = 300 mm (11.8”)
B = 100 mm (4”)

Mounting configuration
Side-mounted

Net fits this way



Part No.: 7500942

Fixture Weight
SWL: 5 kg (11 lbs)

Fixture Dimensions
A = 210 mm (8.3”)
B = 180 mm (7”)
C = 130 mm (5.1”)

Mounting configuration
Rear-mounted



Net fits this way

Part No.: 7500945

Fixture Weight
SWL: 20 kg (44 lbs)

Fixture Dimensions
A = 500 mm (19.7”)
B = 140 mm (5.5”)

Mounting configuration
Rear-mounted



Net fits this way

Part No.: 7500946

Fixture Weight
SWL: 19 kg (42 lbs)

Fixture Dimensions
A = 325 mm (12.7”)
B = 310 mm (12.2”)
C = 220 mm (8.7”)

Mounting configuration
Side-mounted



Net fits this way

Part No.: 7500947

Fixture Weight
SWL: 18 kg (40 lbs)

Fixture Dimensions
A = 430 mm (17”)
B = 168 mm (6.6”)
C = 160 mm (6.3”)

Mounting configuration
Side-mounted



Net fits this way

Part No.: 7500948

Fixture Weight
SWL: 10 kg (22 lbs)

Fixture Dimensions
A = 460 mm (18.1”)
B = 190 mm (7.5”)
C = 130 mm (5.1”)

Mounting configuration
Side-mounted



Net fits this way

Part No.: 7500949

Fixture Weight
SWL: 17 kg (37.5 lbs)

Fixture Dimensions
A = 250 mm (9.8”)
B = 100 mm (4.0”)

Mounting configuration
Rear-mounted



Net fits this way

Part No.: 7500950

Fixture Weight
SWL: 5 kg (11 lbs)

Fixture Dimensions
A = 325 mm (12.8”)
B = 240 mm (9.4”)
C = 170 mm (6.7”)

Mounting configuration
Rear-mounted



Net fits this way

Part No.: 7500951

Fixture Weight
SWL: 8 kg (18 lbs)

Fixture Dimensions
A = 260 mm (10.2”)
B = 210 mm (8.3”)
C = 140 mm (5.5”)

Mounting configuration
Rear-mounted



Net fits this way

Nets For CCTV Cameras

Part No.: 7500952

Fixture Weight
SWL: 18 kg (40 lbs)

Fixture Dimensions
A = 295 mm (11.60”)
B = 220 mm (8.66”)
C = 165 mm (6.50”)

Mounting configuration
Rear-mounted



Part No.: 7500952

Fixture Weight
SWL: 18 kg (40 lbs)

Fixture Dimensions
A = 338 mm (13.30”)
B = 220 mm (8.66”)
C = 165 mm (6.50”)

Mounting configuration
Rear-mounted



Part No.: 7500954

Fixture Weight
SWL: 10 kg (22 lbs)

Fixture Dimensions
A = 480 mm (18.9”)
B = 176 mm (7”)

Mounting configuration
Side-mounted



Nets For Self-Retracting Lifelines

Part No.: 7500201

Fixture Weight
SWL: 40 kg (88 lbs)

Fixture Dimensions
A = 295 mm (11.6”)
B = 150 mm (6”)
C = 90 mm (3.5”)

Mounting configuration
Rear-mounted



Net fits this way

Part No.: 7500203

Fixture Weight
SWL: 50 kg (110 lbs)

Fixture Dimensions
A = 350 mm (13.8”)
B = 200 mm (8”)
C = 165 mm (6.5”)

Mounting configuration
Rear-mounted



Net fits this way

Part No.: 7500205

Fixture Weight
SWL: 60 kg (132 lbs)

Fixture Dimensions
A = 475 mm (18.7”)
B = 280 mm (11”)
C = 185 mm (7.3”)

Mounting configuration
Rear-mounted



Net fits this way

Part No.: 7500208

Fixture Weight
SWL: 18 kg (40 lbs)

Fixture Dimensions
A = 170 mm (6.7”)
B = 100 mm (3.9”)
C = 56 mm (2.2”)

Mounting configuration
Rear-mounted



Net fits this way

Nets For Pipe Clamps

Part No.: 7500219

Fixture Weight
SWL: 20 kg (44 lbs)

Fixture Dimensions
A = 380 mm (15”)
B = 285 mm (11”)
C = 120 mm (5”)



Net fits this way

Part No.: 7500220

Fixture Weight
SWL: 15 kg (33 lbs)

Fixture Dimensions
A = 280 mm (11”)
B = 255 mm (10”)
C = 100 mm (4”)



Net fits this way

Part No.: 7500221

Fixture Weight
SWL: 10 kg (22 lbs)

Fixture Dimensions
A = 152 mm (6”)
B = 130 mm (5”)
C = 60 mm (2”)



Net fits this way

Part No.: 7500222

Fixture Weight
SWL: 8 kg (17.6 lbs)

Fixture Dimensions
A = 115 mm (4.5”)
B = 100 mm (4.3”)
C = 45 mm (1.8”)



Net fits this way

Part No.: 7500223

Fixture Weight
SWL: 8 kg (17.6 lbs)

Fixture Dimensions
A = 70 mm (2.8”)
B = 56 mm (2.2”)
C = 30 mm (1.2”)



Net fits this way

Part No.: 7500224

Fixture Weight
SWL: 8 kg (17.6 lbs)

Fixture Dimensions
A = 55 mm (2.2”)
B = 40 mm (1.6”)
C = 30 mm (1.2”)



Net fits this way

Part No.: 7500225

Fixture Weight
SWL: 8 kg (17.6 lbs)

Fixture Dimensions
A = 115 mm (4.5”)
B = 97 mm (3.8”)
C = 45 mm (1.8”)



Net fits this way

Part No.: 7500226

Fixture Weight
SWL: 8 kg (17.6 lbs)

Fixture Dimensions
A = 206 mm (6.6”)
B = 178 mm (7”)
C = 80 mm (3.1”)



Net fits this way

Part No.: 7500227

Fixture Weight
SWL: 8 kg (17.6 lbs)

Fixture Dimensions
A = 250 mm (9.8”)
B = 210 mm (8.2”)
C = 90 mm (3.5”)



Net fits this way

Part No.: 7500228



Fixture Weight
SWL: 8 kg (17.6 lbs)

Fixture Dimensions
A = 206 mm (6.6”)
B = 178 mm (7”)
C = 160 mm (6.3”)



Net fits this way

Nets For Pipe Clamps

Part No.: 7500229

Fixture Weight
SWL: 8 kg (17.6 lbs)

Fixture Dimensions
A = 250 mm (9.8”)
B = 210 mm (8.2”)
C = 180 mm (7.1”)



Net fits this way

Nets For Anode

Part No.: 7500390

Fixture Weight
SWL: 15 kg (33 lbs)

Fixture Dimensions
A = 1525 mm (60”)
B = 65 mm (2.5”)
C = 65 mm (2.5”)



Net fits this way

Nets For Junction Boxes, Heat, Smoke & CO_2 Detectors

Part No.: 7500311

Fixture Weight
SWL: 1 kg (2.2 lbs)

Fixture Dimensions
A = 120 mm (4.7”)
B = 70 mm (2.8”)

Mounting configuration
Rear-mounted



Net fits this way

Part No.: 7500311

Fixture Weight
SWL: 1 kg (2.2 lbs)

Fixture Dimensions
A = 130 mm (5.1”)
B = 130 mm (5.1”)
C = 80 mm (3.1”)

Mounting configuration
Rear-mounted



Net fits this way

Part No.: 7500316

Fixture Weight
SWL: 5 kg (11 lbs)

Fixture Dimensions
A = 150 mm (5.9”)
B = 150 mm (5.9”)
C = 110 mm (4.3”)

Mounting configuration
Rear-mounted



Net fits this way

Part No.: 7500317

Fixture Weight
SWL: 5 kg (11 lbs)

Fixture Dimensions
A = 150 mm (5.9”)
B = 150 mm (5.9”)
C = 150 mm (5.9”)

Mounting configuration
Rear-mounted



Net fits this way

Nets For Crane Boom Stoppers

Part No.: 7500340

Fixture Weight
SWL: 35 kg (77 lbs)

Fixture Dimensions
A = 965 mm (36”)
B = 150 mm (6”)



Net fits this way

Nets For Crown Block Stoppers

Part No.: 7500451

Fixture Weight
SWL: 50 kg (110 lbs)

Fixture Dimensions
A = 1370 mm (54”)
B = 405 mm (16”)
C = 190 mm (7.5”)



Net fits this way

Nets For Bend Restrictors

Part No.: 7500420

Fixture Dimensions
A = 9145 mm (360”)
B = 485 mm (19”)



Net fits this way

Dropsafe Barricades

The Dropsafe Barricade is a work site safety management system.

The Barricade is the only versatile and fully customisable system designed to install in any type of access and work area.

The Barricade system's flexibility enables good housekeeping practices, providing a safer working environment for your personel.

Installation Types

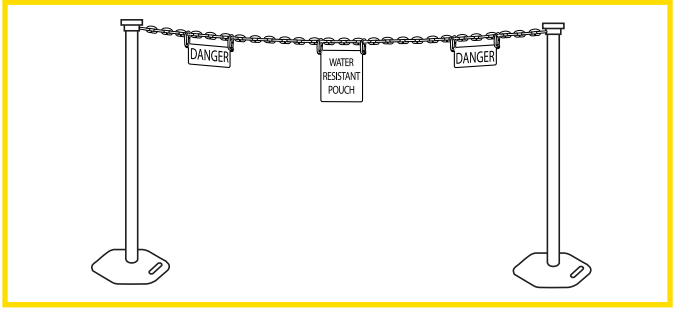

Free Standing

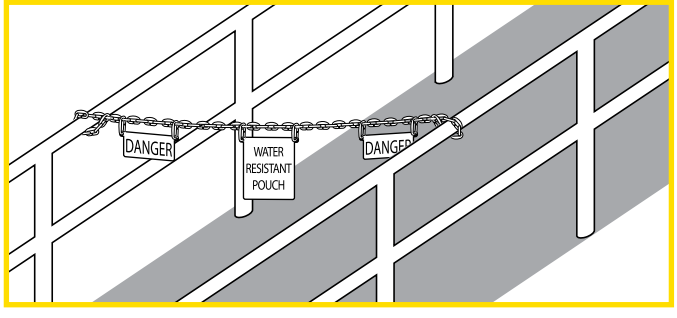

Wrap Attachment

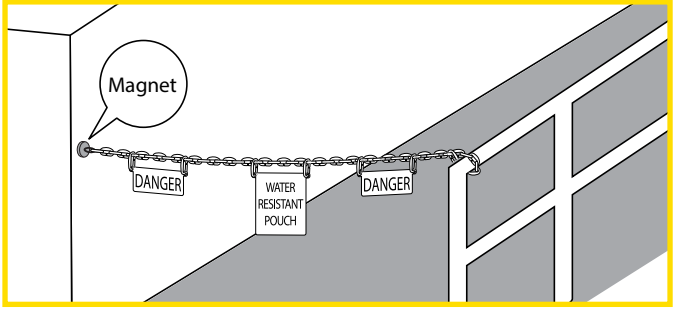

Magnet Attachment

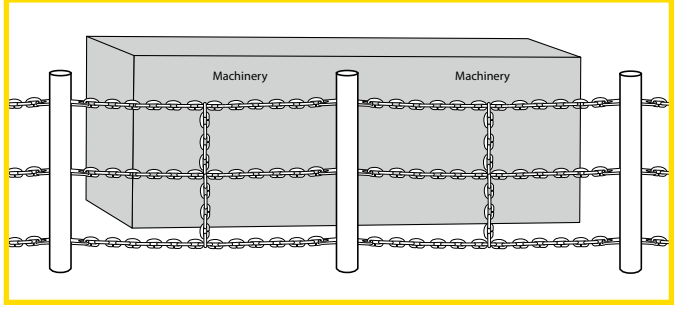

Barricade Fence

Quotations

The Barricade can be used for different applications throughout a facility. The system has multiple attaching options, customisable chain lengths, modular signage and a modular weather resistant documentation pouch. When selecting Barricade components, consider the different areas the Barricade can be used at your facility and the required attachment scenarios. To order, complete the "**General RFQ Form**" (photocopy from Product Guide or download from www.dropsafe.com/resource-centre) and email us at products@dropsafe.com.

Features

- Attachable DANGER and CAUTION signs
- Multiple installation options
- Customisable chain length
- Durable weatherproof and reflective document pouch

Dropsafe Barricades - Products

Part No.: S011002100001

Barricade Set

Colour: Yellow/Black

Units per pack:
- 2x Barricade Post
- 4m Barricade Chain
- 2x CAUTION Sign
- 1x Reflective Pouch Unit

Part No.: S011002100002

Barricade Set

Colour: Red/White

Units per pack:
- 2x Barricade Post
- 4m Barricade Chain
- 2x DANGER Sign
- 1x Reflective Pouch Unit

Part No.: S011002100101

Post

Colour: Yellow

Units per pack:
- 2x Post

Part No.: S011002100102

Post

Colour: Red

Units per pack:
- 2x Post

Part No.: S011002100401

Chain

Colours: Yellow/Black

Units per pack:
- 20m Barricade Chain

Part No.: S011002100402

Chain

Colours: Red/White

Units per pack:
- 20m Barricade Chain

Part No.: S011002100701

Signage

Colour: Yellow

Units per pack:
- 5x CAUTION Sign

Part No.: S011002100702

Signage

Colour: Red

Units per pack:
- 5x DANGER Sign

Part No.: S011002100501

Sleeve

Units per pack:
- 5x Reflective Pouch

Part No.: S011002100601

Magnet

Units per pack:
- 10x Magnet

Dropsafe Brims

The Dropsafe Brim is a safety device designed to tether hard hats to personnel, to reduce the risk of hard hats becoming a dropped object hazard.

The Brim colour options provide easy identification of different personnel types and reduces inventory of hard hat colours.

Each Brim also features a large removable name tag, which has provision for medical and emergency information on reverse.

Application Types

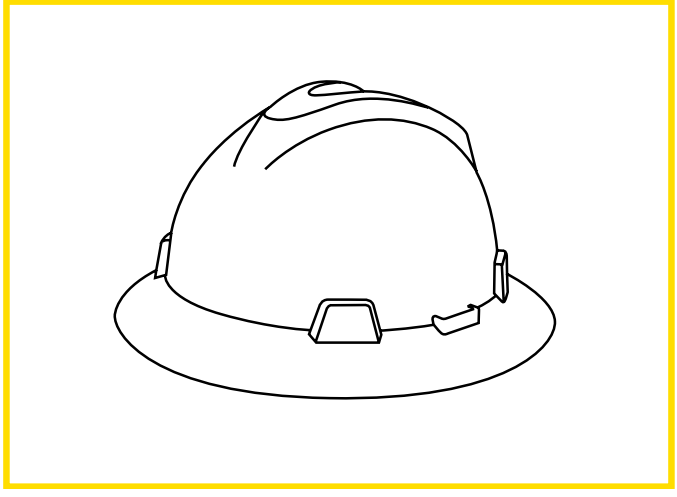

MSA Topgard or V-Gard Protective Hat

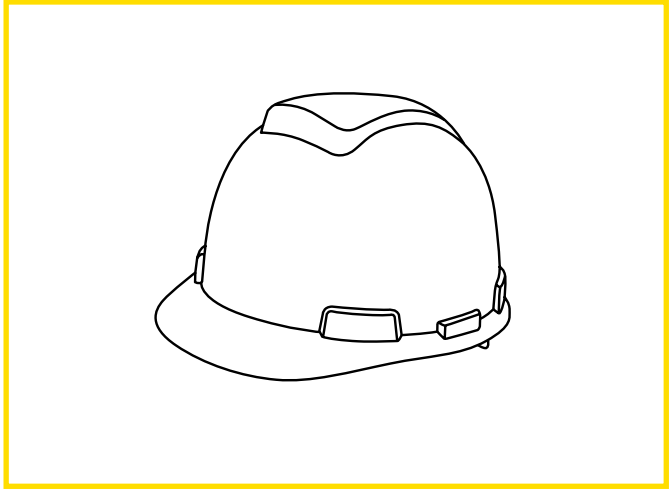

MSA Topgard or V-Gard Protective Cap

Quotations

When ordering the Dropsafe Brim and making the colour selection(s), consider different personel types at your facility, such as supervisors, HSE, trainees, visitors and contractors. The Brims are only designed for MSA® Topgard or V-Guard protective hats or caps. Do not purchase the Dropsafe Brim products if you do not use these hard hats. To order, complete the "**General RFQ Form**" (photocopy from Product Guide or download from www.dropsafe.com/resource-centre) and email us at products@dropsafe.com.

Features

- Heavy duty dropped objects prevention lanyard
- Silicon Brim reduces knock impact
- Removable I.D. and emergency information tag
- Resistant to petro chemicals

Dropsafe Brims - Products

MSA Topgard or V-Gard Protective Hat

MSA Topgard or V-Gard Protective Cap

Part No.: S018002100001

Brim - Large

Colour: Yellow

Units per pack:
- 10x Utility Brim

Compatible with MSA Topgard or V-Gard Protective Hat only
(12.25" x 10.75" x 6.25", 0.88 lb)

Part No.: S018001100301

Brim - Small

Colour: Yellow

Units per pack:
- 10x Utility Brim

Compatible with MSA Topgard or V-Gard Protective Cap only
(11.5" x 8.75" x 5.75", 0.74 lb)

Part No.: S018002100002

Brim - Large

Colour: Red

Units per pack:
- 10x Utility Brim

Compatible with MSA Topgard or V-Gard Protective Hat only
(12.25" x 10.75" x 6.25", 0.88 lb)

Part No.: S018001100302

Brim - Small

Colour: Red

Units per pack:
- 10x Utility Brim

Compatible with MSA Topgard or V-Gard Protective Cap only
(11.5" x 8.75" x 5.75", 0.74 lb)

Part No.: S018002100003

Brim - Large

Colour: Green

Units per pack:
- 10x Utility Brim

Compatible with MSA Topgard or V-Gard Protective Hat only
(12.25" x 10.75" x 6.25", 0.88 lb)

Part No.: S018001100303

Brim - Small

Colour: Green

Units per pack:
- 10x Utility Brim

Compatible with MSA Topgard or V-Gard Protective Cap only
(11.5" x 8.75" x 5.75", 0.74 lb)

Please contact us at products@dropsafe.com for other colours (MOQ = 500 units)

To purchase the lanyard itself go to page 33.

Dropsafe Pouches

Dropsafe Pouches are safety securing devices designed to secure handheld items used at height (such as two-way radios, portable gas detectors, aerosol spray cans and multimeters).

The Pouch fully encloses the item being secured and tethers the item to the user, preventing it from becoming a dropped or falling objects hazard.

Application

Two-way Radio



Portable
Gas Detector

Multimeter

Aerosol Spray Can

Large Handheld
Devices

Quotations

Hand held items used at height vary in shape, size and weight. Ensure the items you intend to secure with the Pouch meet the specifications of the Part No. you select. To order, complete the "**General RFQ Form**" (photocopy from Product Guide or download from www.dropsafe.com/resource-centre) and email us at products@dropsafe.com.

Features

- Designed and tested to over 2.5 times Safe Working Load (SWL)
- SUS/AISI 316 stainless steel wire and components
- TPU coated wires
- Comes with heavy duty belt clip

Dropsafe Pouches - Products

Part No.: S012001100701

Fixture Specifications
SWL: 750 g (1.65 lbs)

A = 60 - 150 mm
(2.4” - 5.9”)
B (Min. circumference)
= 140 mm (6.6”)



Net fits
this way

Part No.: S012002100001

Fixture Specifications
SWL: 1 kg (2.2 lbs)

A = 150 - 250 mm
(5.9” - 9.8”)
B (Min. circumference)
= 210 mm (8.3”)



Net fits
this way

Part No.: S012003100001

Large Handheld Devices

Fixture Specifications
SWL: 1 kg (2.2 lbs)

A = 245 mm (9.6”)
B = 125 mm (4.9”)
C = 45 mm (1.7”)



Net fits
this way

Dropsafe Accessories

Designed for use in harsh offshore and onshore environments, Dropsafe accessories provide application specific solutions to reduce dropped object risks.

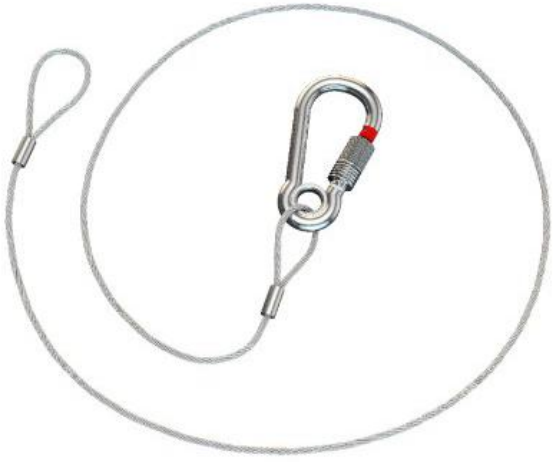

Application Types

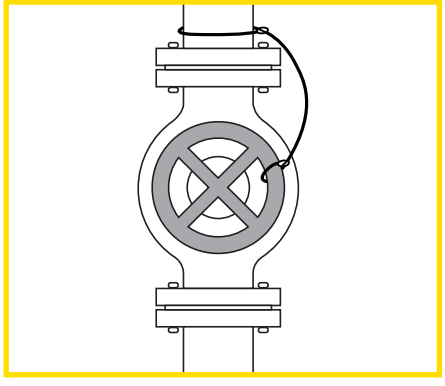

Valve Handle

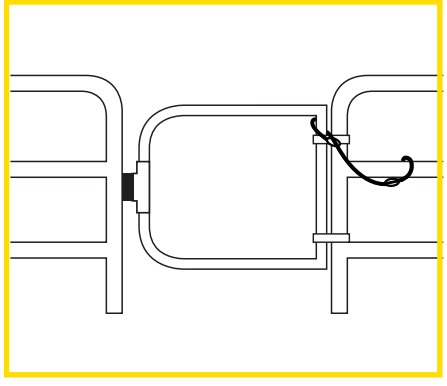

Swing Gate

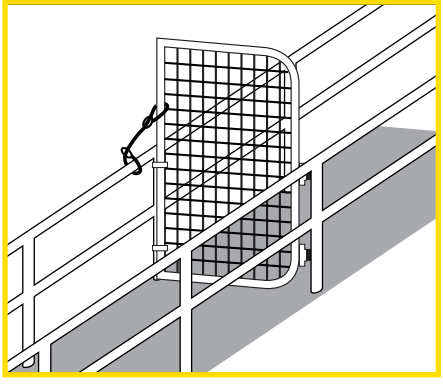

Access Gate

Quotations

It is important that you consider actual safety securing requirements and best practices when selecting Dropsafe Accessories. To order, complete the "**General RFQ Form**" (Photocopy from Product Guide or download from www.dropsafe.com/resource-centre) and email us at products@dropsafe.com.

IMPORTANT Dropped Object Prevention Best Practice

Use Dropsafe Nets as the best practice method of secondary retention (instead of wire or web slings).The Dropsafe 5X SWL, SUS316 nets fully enclose and tether the fixture and components, whereas slings do not fully retain the item being secured.

The light fixtures in these photos were retained using Dropsafe Nets, significantly reducing the risk of injury to personnel. This would not have been possible with a sling.

Crane boom light after collision



Light shade and impact guard dislodged due to corrosion

Features

316 SUS/AISI 316 stainless steel wire and components

5X SWL Designed and tested to over 5 times Safe Working Load (SWL)

Carabiner with spring-loaded gate nut and safety indicator

Dropsafe Accessories - Products

Part No.: S014002141001

Lanyard + Carabiner
SWL: 1 kg (2.2 lbs)

A (Extended) =
1100 mm (43.3"))
B = 70 mm (2.7")

Wire rope + Coating Ø =
3 mm
Carabiner Ø = 7 mm



Part No.: S028005152001

Carabiner
SWL: 80 kg (176 lbs)

A = 70 mm (2.7")
B = 35 mm (1.4")

Carabiner Ø = 7 mm



Part No.: S014002153001

Cable & Carabiner
SWL: 80 kg (176 lbs)

A = 1200 mm (47.2")
B = 70 mm (2.7")

Wire rope Ø = 3 mm
Carabiner Ø = 7 mm



Part No.: S014002153101

Cable & Carabiner
SWL: 80 kg (176 lbs)

A = 2000 mm (78.7")
B = 70 mm (2.7")

Wire rope Ø = 3 mm
Carabiner Ø = 7 mm



Part No.: S014001153301

Cable
SWL: 80 kg (176 lbs)

A = 1200 mm (47.2")
B = 70 mm (2.7")

Wire rope Ø = 3 mm

Part No.: S014001153401

Cable
SWL: 80 kg (176 lbs)

A = 2000 mm (78.7")
B = 70 mm (2.7")

Wire rope Ø = 3 mm



Part No.: S014002153501

Cable & 2 Carabiners
SWL: 80 kg (176 lbs)

A = 1200 mm (47.2")
B = 70 mm (2.7")

Wire rope Ø = 3 mm
Carabiner Ø = 7 mm



Part No.: S014002153601

Cable & 2 Carabiners
SWL: 80 kg (176 lbs)

A = 2000 mm (78.7")
B = 70 mm (2.7")

Wire rope Ø = 3 mm
Carabiner Ø = 7 mm



Part No.: S014002154001

Padlock
SWL: 80 kg (176 lbs)

A = 1000 mm (39.4")
B = 70 mm (2.7")
C = 53 mm (2.0")
D = 40 mm (1.6")
E = 32 mm (1.2")
Wire rope Ø = 3 mm
Padlock Shackle Ø = 7 mm



General RFQ Form (Barricades, Brims, Pouches & Accessories)

Dropsafe®
Drops Prevention Technology

We must receive an accurate and complete form to provide a quotation.

Date: ___ / ___ / _____ (DD / MM / YYYY) Company: _____ Facility: _____
State / Province / Area: _____ Country: _____
Contact Person: _____ Position: _____
Email: _____ Phone: _____

Instructions for completing table below

Dropsafe Safety products are designed to enable safe working practices to enhance work place safety. Please ensure you have read the requirements for each product before completing this form.

1 Enter the Part No.

2 Enter the Quantity.

1 Part No.	2 Quantity	1 Part No.	2 Quantity	1 Part No.	2 Quantity
S011002100001	*20*	*S011002100001*	*20*	*S011002100001*	*20*

Pricing is Ex-works. Select your preferred Ex-works location: ☐ Houston ☐ UK ☐ Dubai ☐ Singapore ☐ Norway ☐ Hong Kong

Please contact us at products@dropsafe.com for any questions.

Version 05/18

Notes

Protecting Your People

Asia Pacific

+852 3664 8350 Head Office
+800 492 2411 Singapore
info@dropsafe.com

Australia

1 800 821 649
australia@dropsafe.com

USA & Canada

1 866 299 2294
usa@dropsafe.com
canada@dropsafe.com

Europe

+0 800 015 9709
europe@dropsafe.com

Middle East & Africa

+971 4 328 4855
middleeast@dropsafe.com

Brazil

brazil@dropsafe.com

Dropsafe is a proud member of:

IADC DROPS CAODC IMCA

Dropsafe®

Drops Prevention Technology

www.dropsafe.com

Patents granted, patents pending and trademarks registered in US, EU, China and other countries.
Copyright © 2018 Newmar Ltd. All rights reserved. Version 09/18